




B = Weight, D = Depth, H = Height

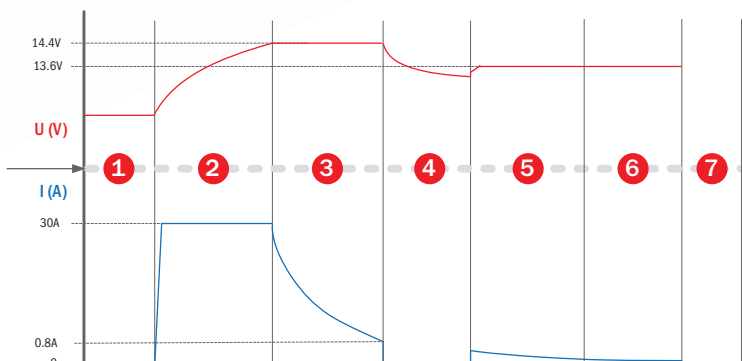

Installation

Equipment damage and possible injuries may result from an incomplete understanding of the installation and operation of the charger. If you are unfamiliar with electrical systems: consult us, a dealer or a licensed electrician.

Read the mounting and user guide carefully.

Maintenance

The charger is maintenance free.

Use

The charger can stand parallel current load up to 30A pr. channel from another user at the same time as it charge the battery.

LED

Battery Voltage	Battery Status	LED Indication
>12.65V	95-100%	All segments on
12.55V-12.65V	80%	4 segments on
12.45V-12.55V	60%	3 segments on
12.35V-12.45V	40%	2 segments on
4.5V-12.35V	0-20%	1 segment on

ShowroomCharger 32A

Item no: 712210

ShowroomCharger 32A

DEFA ShowroomCharger 32A is based on modern switchmode technology and galvanised divisions. This charger represents the latest technology within battery charging and will give the batteries optimum life.

It is well suited to maintenance charge the battery for an unlimited time.

DEFA AS is conforming to the requirements of IATF 16949:2016, ISO 9001:2015, 14001:2015, OHSAS 18001:20070. In addition to this, our engine heaters and cables are conforming to the requirements of ISO/TS 16949:2002.

Technical specifications

Input voltage [VAC]	230
Operating temperature [°C]	-20/+40
Charging voltage* S1 [VDC]	14,4
Maintenance charging S2 [VDC]	13,6
Charging current [A]	32
IP rating [IP]	44
H/W/D [mm]	227/125/62
Weight [kg]	1,7
AC Power cable length [m]	5
DC charging cable length [m]	2,5
Certifications	EN60335-1, EN60335-2-29, EN55014-1, EN55014-2, EN61003-3/2