



---

# DEFA Miniplug Xtreme

Item numbers: See page 3

# DEFA Miniplug Xtreme

## Connection cable 1,5mm<sup>2</sup>

DEFA MiniPlug Xtreme connection cable is adapted to DEFA MiniPlug inlet cable and gives a reliable and good connection from electricity outlets to the car. The MiniPlug Xtreme is more durable and is suitable for cold weather and rough treatment. Xtreme has a black cap to distinguish from the MiniPlug.


### Use

Connect (A) to the DEFA MiniPlug inlet cable contact in the front of your vehicle. Make sure not to harm or damage the connection cable.

Ensure not to damage the cable insulation by squeezing the cable under the hood or in the doorway. Keep the cap on when the cable is not in use.

### Maintenance

Disconnect the cable. Apply some silicon spray on the MiniPlug contact terminals before and after the season and ensure that either the cable or cap is damaged.

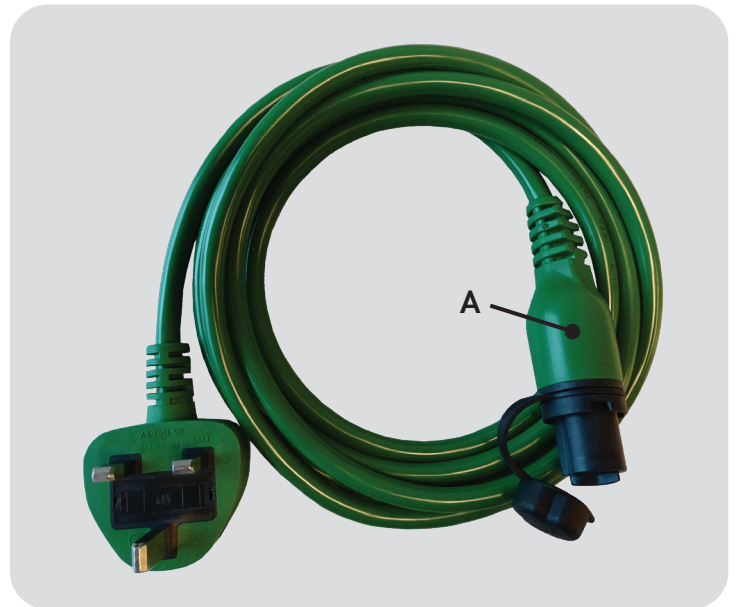

# Specifications

<b>Item numbers:</b>	460910	DEFA Miniplug Connection Cable 2,5m
	460911	DEFA Miniplug Connection Cable 5,0m
	460912	DEFA Miniplug Connection Cable 10,0 m
<b>Voltage:</b>	250V	
<b>Fuse:</b>	13A	
<b>Length:</b>	2.5 / 5.0 / 10m	
<b>MiniPlug (A) IP rating:</b>	IP44	
<b>Testing &amp; acceptance</b>	EN 60309-1, EN 60309-2	
	DEFA AS is conforming to the requirements ISO 9001, ISO 14001 and ISO 45001. In addition to this, our engine heaters and cables are conforming to the requirements of IATF 16949.	